
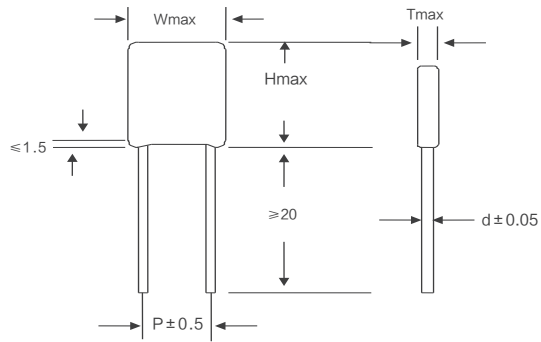


CL11 有感金属箔式聚脂膜电容器

Inductive Metallized foil polyester film capacitor

外形图 Outline Drawing



单位 Unit: mm

特点 Features

- 电气性能优良，可靠性高
- 环氧树脂封装
- Better electric property, high reliability
- Epoxy resin coating

主要用途 Typical Applications

- 适用于频率高、耐高温压高的节能灯电路中
- Especially suitable for energy-saving lamps with high Voltage and frequency and temperature

技术要求 Specifications

工作温度 Ambient Temperature	-55°C ~ +105°C
容量偏差 Capacitance Tolerance	J: ±5%; K: ±10%
耐电压 Voltage Proof	2.5U _R
损耗角正切 Dissipation Factor	≤0.01 (20°C, 1kHz)
绝缘电阻 Insulation Resistance	≥5000MΩ (20°C, 100V, 1min)

■ 外形尺寸 Dimensions (mm)

电容量 CAP.	100V				160V				250V			
	W	H	T	P	W	H	T	P	W	H	T	P
222	7.0	11.0	4.0	4.0	7.0	11.0	4.0	4.0	7.0	11.0	4.5	4.5
472	7.0	11.0	4.0	4.0	7.0	11.0	4.0	4.0	7.5	11.0	5.0	5.0
682	7.0	11.0	5.0	5.0	7.0	11.0	5.0	5.0	8.0	12.0	4.5	5.0
103	7.8	10.0	4.0	5.0	7.8	10.0	4.0	5.0	8.0	12.0	4.5	5.0
123	7.5	11.0	4.5	5.0	7.5	11.0	4.5	5.0	8.0	12.5	5.0	5.0
153	8.0	11.0	5.0	5.0	8.0	11.0	5.0	5.0	8.0	13.0	5.0	5.0
183	8.5	11.0	5.5	5.0	8.5	11.0	5.5	5.0	8.5	13.0	5.0	6.5
223	7.5	10.5	5.0	5.0	7.5	10.5	5.0	5.0	8.5	13.5	5.0	6.5
273	8.5	12.5	4.5	5.0	8.5	12.5	4.5	5.0	9.0	13.5	5.5	6.5
333	8.5	13.0	5.0	5.0	8.5	13.0	5.0	5.0	11.5	14.0	6.5	7.5
473	9.0	12.5	5.5	5.0	9.0	12.5	5.5	5.0	11.5	14.5	6.5	7.5
563	9.5	13.0	6.0	6.5	9.5	13.0	6.0	6.5	12.0	14.5	7.0	7.5
683	10.0	13.0	6.5	6.5	10.0	13.0	6.5	6.5	12.0	15.0	7.5	7.5
104	10.5	14.5	7.0	7.0	10.5	14.5	7.0	7.0	13.5	15.5	8.5	10.0
154	12.5	15.0	7.0	7.5	12.5	15.0	7.0	7.5	14.5	15.5	9.0	10.0
224	13.5	15.0	9.0	8.0	13.5	15.0	9.0	8.0	15.0	15.5	9.5	10.0

电容量 CAP.	400V				630V				1000V			
	W	H	T	P	W	H	T	P	W	H	T	P
471	6.5	11.0	4.5	4.0	7.5	12.0	5.0	4.0	7.5	12.0	5.0	4.0
511	6.5	11.0	4.5	4.0	7.5	12.0	5.0	4.0	7.5	12.0	5.0	4.0
821	7.0	11.0	4.5	4.0	7.5	12.0	5.0	5.0	7.5	12.0	5.0	5.0
102	7.0	11.0	4.0	5.0	7.0	12.0	4.0	4.0	7.5	11.0	4.0	5.0
122	7.0	11.0	4.0	5.0	7.5	11.0	4.0	4.0	7.5	11.0	4.0	4.0
152	7.5	11.0	4.5	5.0	7.5	12.0	4.0	4.0	7.5	11.0	4.0	5.0
182	7.5	11.0	4.5	5.0	7.5	12.0	4.5	5.0	7.5	12.0	4.5	5.0
222	7.0	11.0	5.0	4.5	7.0	13.0	5.0	4.5	7.5	12.0	5.0	5.0
272	7.0	11.0	4.0	4.0	7.0	13.0	5.0	4.0	7.5	12.5	5.0	5.0
332	7.5	11.0	4.0	4.0	7.5	13.0	5.0	4.0	7.5	12.5	5.0	5.0
392	7.5	11.0	4.5	4.0	7.5	13.0	5.0	5.0	7.5	13.0	5.0	5.0
472	7.5	11.0	4.5	4.0	7.5	13.0	5.0	5.0	7.5	13.0	5.0	5.0
562	7.5	13.0	5.0	5.0	8.0	13.0	5.0	5.0	8.0	13.0	5.0	5.0
682	8.0	13.0	5.5	5.0	8.5	13.0	5.5	5.0	9.5	13.5	6.0	6.0
822	8.5	13.0	5.5	5.0	8.5	13.0	5.5	5.0	8.5	13.0	5.5	5.0
103	9.5	13.0	5.0	5.0	10.0	14.5	5.5	7.0	10.0	14.5	5.5	7.0
123	9.0	13.0	5.0	6.0	10.0	14.5	6.0	7.5	10.0	14.5	6.0	7.5
183	9.5	14.5	5.5	6.5	10.0	14.5	6.0	7.5	10.0	14.5	6.0	7.5
223	10.0	14.5	6.0	6.5	10.5	15.0	6.5	7.5	10.5	15.0	6.5	7.5
333	11.0	14.5	6.0	7.5	11.0	15.0	7.0	7.5	11.0	15.0	7.0	7.5
473	11.5	14.5	6.5	7.5	14.0	17.5	8.5	7.5	14.0	17.5	8.5	7.5
683	13.5	15.0	8.0	8.5	15.0	17.0	8.5	7.5	15.0	17.0	8.5	7.5
104	15.0	15.5	9.5	10.0	16.0	17.0	9.5	10.0	16.0	17.0	9.5	10.0

■ 外形尺寸 Dimensions (mm)

电容量 CAP.	1200V				1200V				1500V			
	W	H	T	P	W	H	T	P	W	H	T	P
471	7.5	11.5	4.5	5.0					7.5	12.0	4.5	5.0
511	7.5	11.5	4.5	5.0					7.5	12.0	4.5	5.0
561	7.5	11.5	4.5	5.0					7.5	12.0	5.0	5.0
681	7.5	12.5	4.5	4.0	8.0	11.5	4.0	5.0	7.5	12.0	5.0	5.0
821	8.0	11.5	4.5	5.0					7.5	12.0	5.5	5.0
102	7.5	13.5	4.5	4.0	8.0	13.0	4.5	5.0	8.0	13.0	5.0	5.0
122	7.0	13.5	4.5	4.0	7.5	13.0	4.5	5.0	8.0	13.0	5.0	5.0
152	7.5	13.0	4.5	5.0					8.0	13.0	5.5	5.0
182	8.0	14.0	5.0	5.0					8.5	14.0	5.5	5.0
222	8.0	14.0	5.0	5.0	8.0	14.0	5.0	6.0	8.5	14.0	5.5	5.0
272	8.5	14.5	5.0	5.0	8.5	14.5	5.0	5.5	9.0	14.5	5.5	5.0
302	9.0	14.5	5.5	5.0					9.0	14.5	5.5	5.0
332	9.0	14.5	5.5	5.0	9.0	14.5	5.5	6.0	9.0	14.5	6.0	5.0
352	9.0	14.5	5.5	5.0					9.0	14.5	6.5	5.0
392	9.0	14.5	6.0	5.0	9.0	14.5	6.0	6.0	9.0	14.5	6.5	5.5
402	9.0	14.5	6.0	5.0	9.0	14.5	6.0	6.0	9.5	14.5	6.5	5.5
432	9.0	14.5	6.0	6.0								
452	9.5	14.5	6.0	5.0								
472	9.5	14.5	6.0	5.0	9.0	14.0	5.5	6.0				
502	10.0	14.5	6.0	5.0								
562	11.0	15.0	6.0	5.5	11.0	15.0	6.0	7.0				
682	11.5	15.5	7.0	7.5								
822	11.5	15.5	7.0	7.5								
103	12.5	17.0	7.5	7.0	12.5	17.0	7.5	7.5				

注：上表中未包含的产品规格可根据用户要求进行设计和制造

Note: Product specifications not included in this table can be designed and manufactured according to user requirements